



PRODUCT SUPPORT.....SERVICE NEWS

BULLETIN NO.: 2006-006	DATE: June 1, 2006	PAGE: 1 of 4
TITLE: Oil Filter Installation Tool (49320-20520)	RELEASE: Dealer/Customer	
SECTION: Power	MODEL: 90/95ZV-2	

GENERAL:

The purpose of this document is to announce a tool kit that can be purchased to assist in replacement of the oil filters for models 90/95ZV-2. This can help to avoid spillage of oil when replacing the oil filter.


DETAIL:

Details of the tool composition and use are shown below.

Tool kit part number is 49320-20520.

Individual parts of the tool kit

Item	Description	Part Number	Qty. required
1	Arm	41751-30210	1
2	Hanger	41711-56480	1
3	Flanged Nut	62480-21101	2
4	Flanged Bolt	61802-10020	1
5	Adjustment Plate	41711-56470	1
6	Holder (webbing)	43584-20010	1

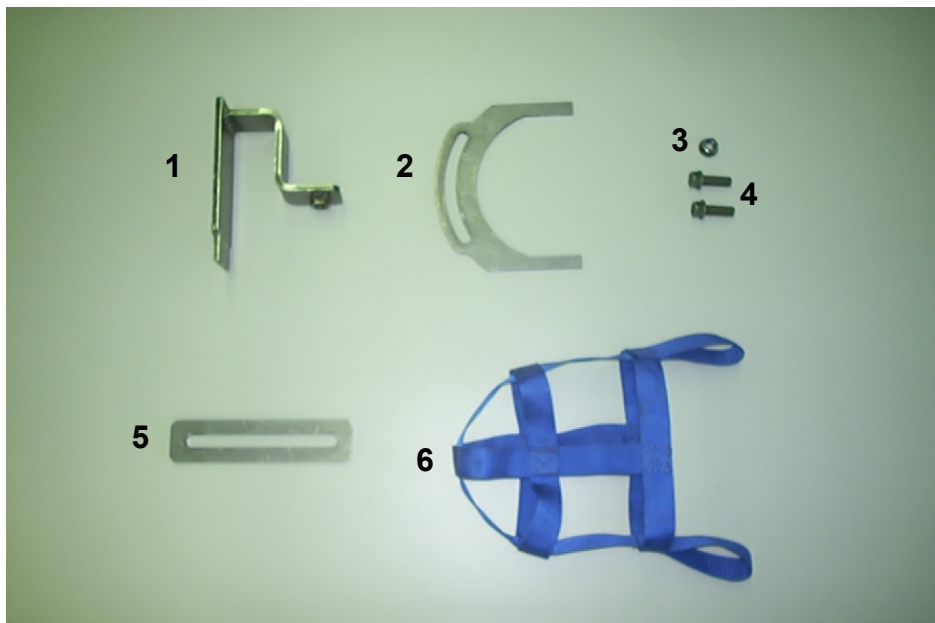

KAWASAKI CONSTRUCTION MACHINERY CORP. OF AMERICA
KENNESAW, GEORGIA
(770) 499-7000 PHONE / (770) 421-6843 FAX



PRODUCT SUPPORT.....SERVICE NEWS

BULLETIN NO.: 2006-006

DATE: June 1, 2006

PAGE: 2 of 4

TITLE: Oil Filter Installation Tool (49320-20520)

RELEASE: Dealer/Customer

SECTION: Power

MODEL: 90/95ZV-2

Detail (continued); Description of use.

Check that you have all pieces shown on page one, then assemble the parts.

Parts are shown loosely assembled below.

To start, comfortably assemble the pieces so they are not excessively tight and the pieces can be moved around and manipulated.

Top View



Bottom View



CAUTION

BURN HAZARD

Do not do this work while parts are hot.

Let all items cool before commencing work.





PRODUCT SUPPORT.....SERVICE NEWS

BULLETIN NO.: 2006-006

DATE: June 1, 2006

PAGE: 3 of 4

TITLE: Oil Filter Installation Tool (49320-20520)



RELEASE: Dealer/Customer

SECTION: Power

MODEL: 90/95ZV-2

Detail (continued); Description of use.

Insert Arm into the tool slot on the chassis as shown below.

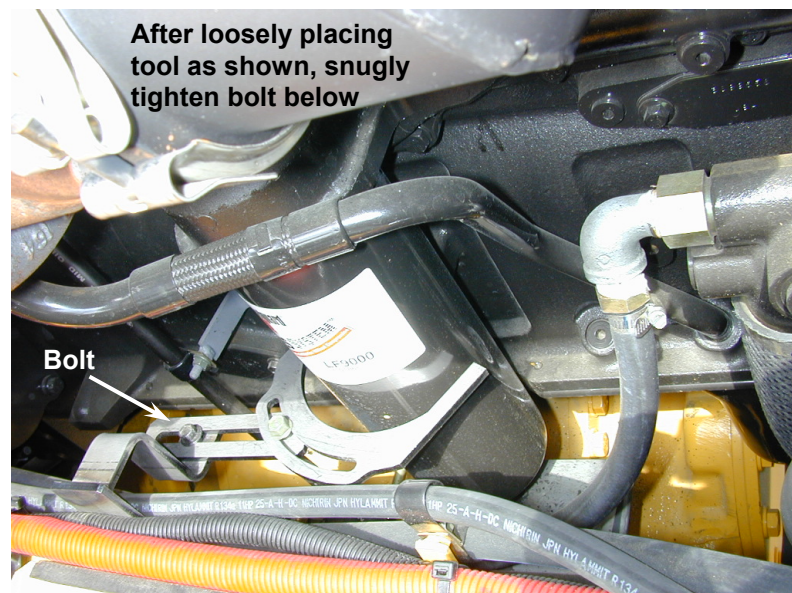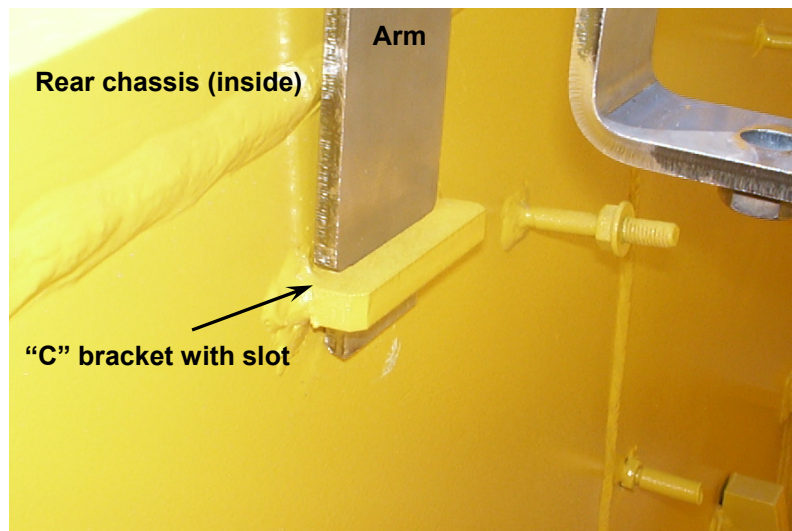

KAWASAKI CONSTRUCTION MACHINERY CORP. OF AMERICA
KENNESAW, GEORGIA
(770) 499-7000 PHONE / (770) 421-6843 FAX




PRODUCT SUPPORT.....SERVICE NEWS

BULLETIN NO.: 2006-006	DATE: June 1, 2006	PAGE: 4 of 4
TITLE: Oil Filter Installation Tool (49320-20520)	RELEASE: Dealer/Customer	
SECTION: Power	MODEL: 90/95ZV-2	

Detail (continued); Description of use.

Place the holder in position so it can keep the filter from falling when it is loosened.

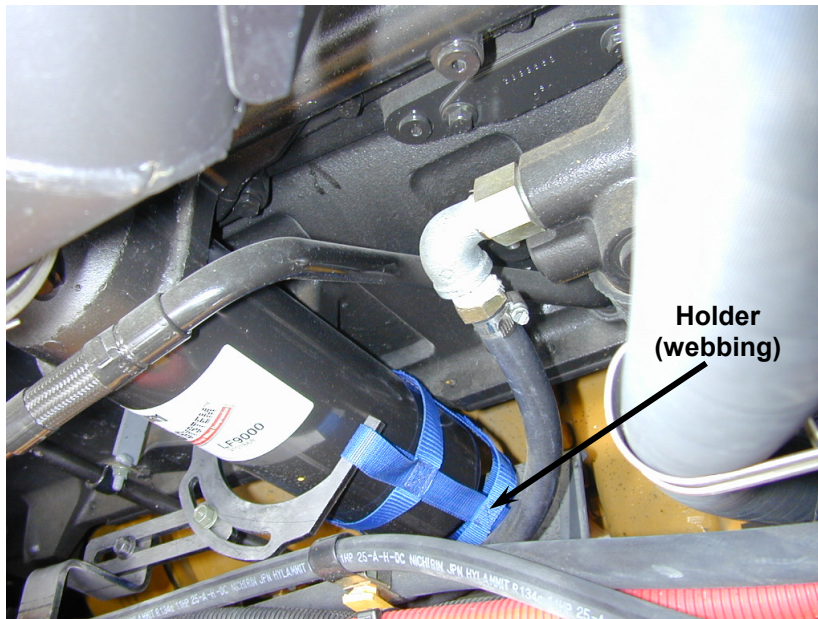

Loosen very slowly with filter wrench and safely remove filter.



Clean filter base thoroughly. Check that all filter head parts are secure and that filter stud has not loosened. Fill new oil filter with clean oil. Install new filter in reverse order. Tighten moderately, with 1/2 to 3/4 round of rotation after initial contact.

IMPORTANT

DO NOT OVERTIGHTEN! Excessive torque can damage filter head.

KAWASAKI CONSTRUCTION MACHINERY CORP. OF AMERICA
KENNESAW, GEORGIA
(770) 499-7000 PHONE / (770) 421-6843 FAX